


SUPAFLASH

A practical way to provide overflow protection to meet AS3500.3 (2015) requirements.

Tested by our own plumbers this flashing is installed around the higher parts of the gutter to maintain that crucial clearance needed between the top bead of the gutter to prevent water flowing into the eaves.

Supaflash works best with quad, ogee, or miniline installed under tiled roofs. Supaflash is not seen once installed and doesn't create ugly gaps behind the gutter as a spacer will, so your customers job will have a normal, acceptable appearance for which they will be happy to pay.

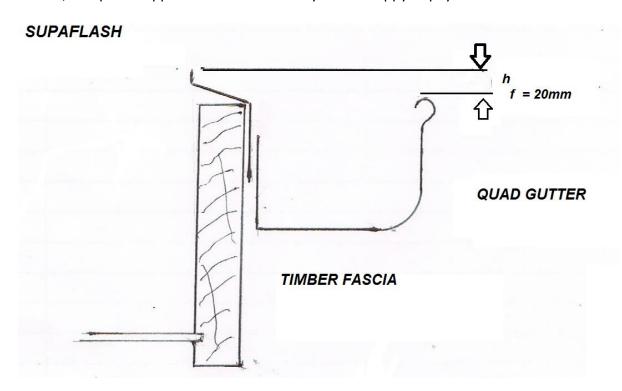

Supaflash and Supaquad can give you the best quad gutter result

With Supaquads greater carrying capacity (up to 40% more) hf can be further reduced to 12mm thus reducing the amount of flashing needed on a job.

Pricing \$64.50/PACK (30LM) + GST

